




## TIME FOR THINGS TO TURN

The NH 6020 E trailer, with its optimized focus on the needs of the user, is the right drum screen for the various challenges in modern waste processing.

The compact machine features large safety doors for easy maintenance, requires little tooling time and provides a convincing separation result. The drum screen trailer masters difficult raw and residual materials.

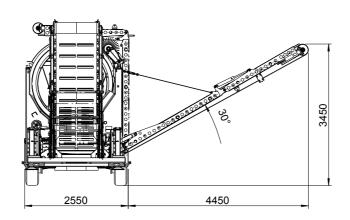

	Centre-axle chassis with brake system and vehicle lighting for 80 km/h as per StVO, with ABS	Centre-axle chassis with brake system and vehicle lighting for 80 km/h as per StVO, with ABS
Total weight	approx. 19,000 kg	approx. 19,000 kg
Drive	Hybrid	Diesel hydraulic
Output	Power unit 110 kVA	Diesel engine 86 kW / 117 PS
	Electrical motor 55 kW	
Emission standard	In accordance with the latest emission standard	EU Stage V / EPA Tier 4 Final
Cubic capacity	4.5 litres	4.5 litres
Fuel tank	300 litres	300 litres
Hopper volume	$5  \text{m}^3$	5 m <sup>3</sup>
Drum screen		
Length	5,500 mm	5,500 mm
Diameter	2,000 mm	2,000 mm
Material thickness	6 - 8 - 10 - 12 mm	6 - 8 - 10 - 12 mm
Hole width	8 - 100 mm	8 - 100 mm
Drum speed	0 - 21 rpm	0 - 21 rpm

