

**THOR**<sup>®</sup>  
GLOBAL

## **LOPRO**

LOW PROFILE TELESCOPIC  
PORTABLE RADIAL CONVEYOR



**MOVE  
MOUNTAINS.**



## FEATURES

THE LOWEST FEED HEIGHT IN THE INDUSTRY  
WHILE MAINTAINING A LARGE TRUSS DEPTH FOR  
STRENGTH AND STABILITY



### STANDARD FEATURES

- FLEXCO EZP1 PRIMARY SCRAPER WITH URETHANE BLADE & TENSIONER
- BELT SPLICE: VULCANIZED
- CONTACTORS: IEC
- GEAR REDUCERS: CLASS 2
- IDLERS: CEMA C
- SAFETY GUARDING
- STEEL: 60,000 PSI
- TAIL PULLEY KICKER BAR



### OPTIONAL FEATURES

- ANCHOR PAD
- COLOUR: CUSTOM
- DUAL DRIVE
- GALVANIZING: HOT-DIP
- BELT SCALE
- HOPPER LINING
- IMPACT BED
- WIRELESS REMOTE CONTROL
- PROGRAM PACKAGE: ZERO SEG
- HYDRAULIC PUSH DOWN AXLE
- TOW HITCH
- TRANSPORT LANDING LEGS: HYDRAULIC
- WIRE REMOTE TOUCH SCREEN: Dual
- WIRELESS REMOTE CONTROL
- TRAINING: ONSITE
- THIRD AUXILIARY AXLE



### CONVEYOR DIMENSIONS

| MODEL               | BELT WIDTH | LENGTH | CAPACITY       |
|---------------------|------------|--------|----------------|
| LPT130x36-0800/1000 | 900 mm     | 40 m   | 725/900 MTPH   |
| LPT150x36-0800/1000 | 900 mm     | 45 m   | 725/900 MTPH   |
| LPT130x42-1200/1500 | 1050 mm    | 40 m   | 1100/1350 MTPH |
| LPT150x42-1200/1500 | 1050 mm    | 45 m   | 1100/1350 MTPH |

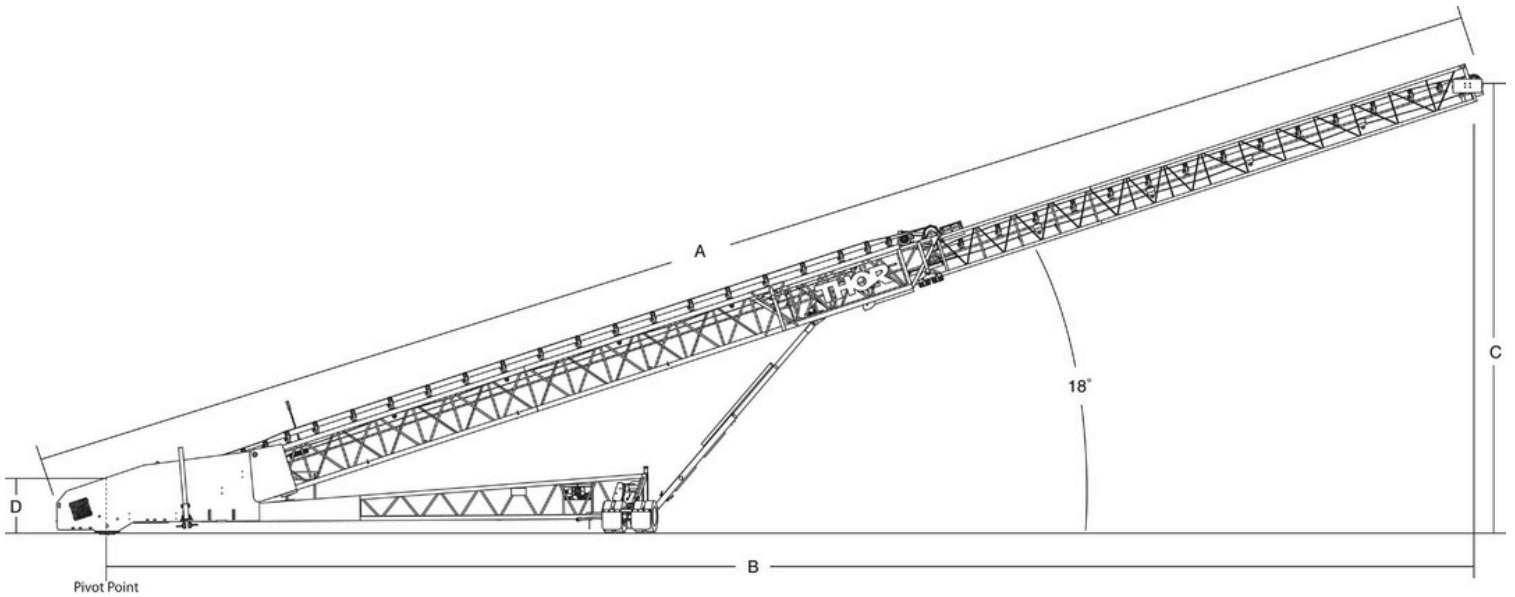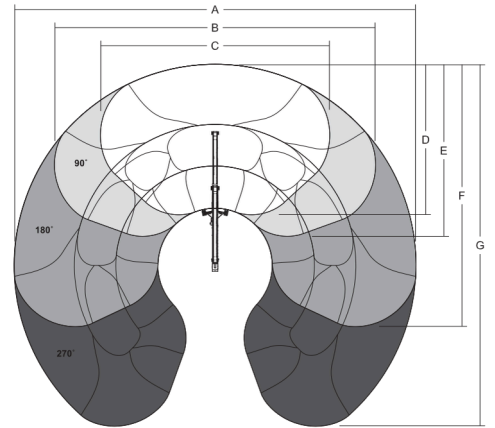

### STOCKPILE SPECIFICATIONS

| MODEL               | A      | B     | C     | D     | E     | F     | G      |
|---------------------|--------|-------|-------|-------|-------|-------|--------|
| LPT130x36-0800      | 104.6m | 82.6m | 58.0m | 37.4m | 43.2m | 66.9m | 93.6m  |
| LPT150x36-0800/1000 | 120.9m | 95.4m | 67.1m | 44.5m | 50.7m | 77.3m | 108.1m |
| LPT130x42-1200/1500 | 104.6m | 82.6m | 58.0m | 37.4m | 43.2m | 66.9m | 93.6m  |
| LPT150x42-1200/1500 | 122.6m | 97.1m | 68.8m | 43.9m | 51.1m | 79.0m | 109.8m |



STOCKPILE CAPACITIES

| MODEL               | BELT WIDTH | 45°                                 | 90°                                 | 180°                                | 270°                                 | For Each<br>Additional 1°     |
|---------------------|------------|-------------------------------------|-------------------------------------|-------------------------------------|--------------------------------------|-------------------------------|
| LPT130x36-0800      | 900mm      | 8,890.8 m <sup>3</sup><br>15,700 T  | 14,825.6 m <sup>3</sup><br>26,177 T | 26,693.0 m <sup>3</sup><br>47,135 T | 38,561.3 m <sup>3</sup><br>68,091 T  | 131.9 m <sup>3</sup><br>233 T |
| LPT150x36-0800/1000 | 900mm      | 14,111.5 m <sup>3</sup><br>24,917 T | 23,515.4 m <sup>3</sup><br>41,521 T | 42,322.5 m <sup>3</sup><br>74,731 T | 61,130.2 m <sup>3</sup><br>107,940 T | 209.0 m <sup>3</sup><br>369 T |
| LPT130x42-1200/1500 | 1050mm     | 8,890.8 m <sup>3</sup><br>15,700 T  | 14,825.6 m <sup>3</sup><br>26,177 T | 26,693.0 m <sup>3</sup><br>47,135 T | 38,561.3 m <sup>3</sup><br>68,091 T  | 131.9 m <sup>3</sup><br>233 T |
| LPT150x42-1200/1500 | 1050mm     | 14,985.5 m <sup>3</sup><br>26,461 T | 24,777.9 m <sup>3</sup><br>43,750 T | 44,360.7 m <sup>3</sup><br>78,329 T | 63,943.9 m <sup>3</sup><br>112,909 T | 217.6 m <sup>3</sup><br>384 T |

