

THOR[®]
GLOBAL

LOPRO

LOW PROFILE TELESCOPIC
PORTABLE RADIAL CONVEYOR



**MOVE
MOUNTAINS.**

FEATURES

THE LOWEST FEED HEIGHT IN THE INDUSTRY
WHILE MAINTAINING A LARGE TRUSS DEPTH FOR
STRENGTH AND STABILITY



STANDARD FEATURES

- FLEXCO EZP1 PRIMARY SCRAPER WITH URETHANE BLADE & TENSIONER
- BELT SPLICE: VULCANIZED
- CONTACTORS: IEC
- GEAR REDUCERS: CLASS 2
- IDLERS: CEMA C
- SAFETY GUARDING
- STEEL: 60,000 PSI
- TAIL PULLEY KICKER BAR



OPTIONAL FEATURES

- ANCHOR PAD
- COLOUR: CUSTOM
- DUAL DRIVE
- GALVANIZING: HOT-DIP
- BELT SCALE
- HOPPER LINING
- IMPACT BED
- WIRELESS REMOTE CONTROL
- PROGRAM PACKAGE: ZERO SEG
- HYDRAULIC PUSH DOWN AXLE
- TOW HITCH
- TRANSPORT LANDING LEGS: HYDRAULIC
- WIRE REMOTE TOUCH SCREEN: Dual
- WIRELESS REMOTE CONTROL
- TRAINING: ONSITE
- THIRD AUXILIARY AXLE



CONVEYOR DIMENSIONS

MODEL	BELT WIDTH	LENGTH	CAPACITY
LPT130x36-0800/1000	900 mm	40 m	725/900 MTPH
LPT150x36-0800/1000	900 mm	45 m	725/900 MTPH
LPT130x42-1200/1500	1050 mm	40 m	1100/1350 MTPH
LPT150x42-1200/1500	1050 mm	45 m	1100/1350 MTPH

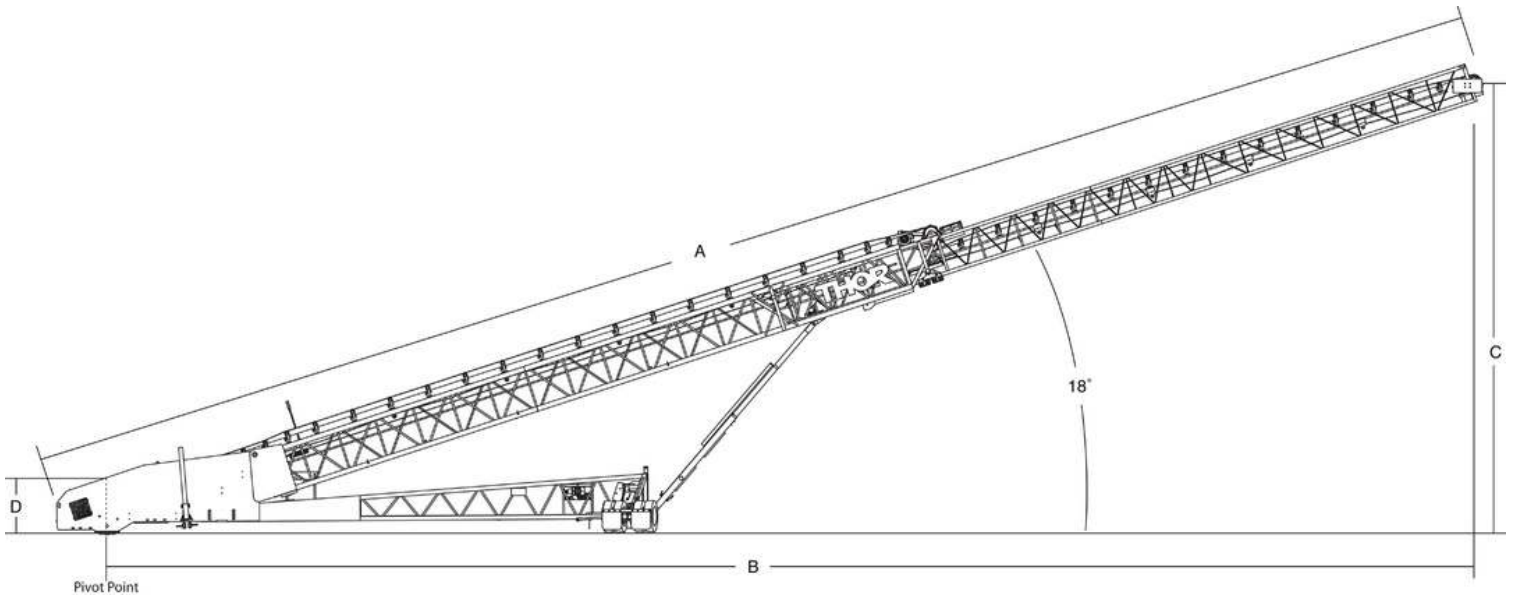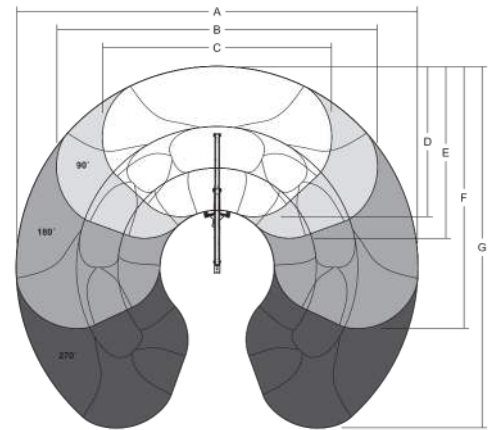

STOCKPILE SPECIFICATIONS

MODEL	A	B	C	D	E	F	G
LPT130x36-0800	104.6m	82.6m	58.0m	37.4m	43.2m	66.9m	93.6m
LPT150x36-0800/1000	120.9m	95.4m	67.1m	44.5m	50.7m	77.3m	108.1m
LPT130x42-1200/1500	104.6m	82.6m	58.0m	37.4m	43.2m	66.9m	93.6m
LPT150x42-1200/1500	122.6m	97.1m	68.8m	43.9m	51.1m	79.0m	109.8m

STOCKPILE CAPACITIES

MODEL	BELT WIDTH	45°	90°	180°	270°	For Each Additional 1°
LPT130x36-0800	900mm	8,890.8 m ³ 15,700 T	14,825.6 m ³ 26,177 T	26,693.0 m ³ 47,135 T	38,561.3 m ³ 68,091 T	131.9 m ³ 233 T
LPT150x36-0800/1000	900mm	14,111.5 m ³ 24,917 T	23,515.4 m ³ 41,521 T	42,322.5 m ³ 74,731 T	61,130.2 m ³ 107,940 T	209.0 m ³ 369 T
LPT130x42-1200/1500	1050mm	8,890.8 m ³ 15,700 T	14,825.6 m ³ 26,177 T	26,693.0 m ³ 47,135 T	38,561.3 m ³ 68,091 T	131.9 m ³ 233 T
LPT150x42-1200/1500	1050mm	14,985.5 m ³ 26,461 T	24,777.9 m ³ 43,750 T	44,360.7 m ³ 78,329 T	63,943.9 m ³ 112,909 T	217.6 m ³ 384 T

