



TITAN

RANGE



RETURN OF THE TITANS



The Powerscreen® Titan range has been added to the product portfolio to fulfil a requirement for a secondary scalper and provide a cost-effective solution in high volume applications, where the features of the equivalent Warrior model are not required.

Their smaller recommended feed sizes mean that they are not designed for heavy duty face scalping, but they are engineered to excel in a wide range of applications, from aggregates to biomass to construction and demolition waste.

THE TITAN RANGE INCLUDES:

Titan 600



Titan 1300



Titan 2300



TITAN 600



The Titan 600 is a versatile 2 Deck Tracked Scalping Screen, in a compact footprint, with the capacity to screen up to 280tph (308 US tph) depending on the application.

The Titan 600 can be rapidly switched between a 2- and 3-way split making it a highly versatile machine suitable for a range of applications.



APPLICATIONS

AGGREGATE



Sand & gravel
Blasted rock
River rock

RECYCLING



Top Soil
C&D waste
Composed materials
Wood By-Products
Overburden
Foundry Waste

MINING



Processed ores
Processed minerals

TECHNICAL HIGHLIGHTS



- High capacity output up to 280tph (308 US tph) from a compact footprint



- Versatile unit for 3 or 2-way splitting, stockpiling or scalping before or after a crusher



- Heavy duty 2.49m x 1.17m (8' 2" x 3' 10") single shaft incline screenbox with adjustable stroke



- Smart design minimises weight but retains strength and robustness

- Rapid conversion from 3 way split to 2-way split

- Ultra-low fuel consumption with optimised hydraulics

- Fits inside a 40' shipping container to simplify the transport process and can be transported



TECHNICAL SPECIFICATION

1 FEEDER/HOPPER

1000mm wide (40") heavy duty belt feeder
Hopper Capacity: 3m³ (3.9 cu. yd)
Fold down rear door for crusher feeding

2 SCREENBOX

Heavy Duty 2.49m x 1.17m (8' 2" x 3' 10") 2 deck screen
Highly aggressive screen drive
2 bearing shaft with Direct Drive system

3 OVERSIZE TAIL CONVEYOR

1000mm (40") wide
2.7m (8' 10") stockpile height
Impact slips along feedboot
Variable speed control

4 FINE SIZE SIDE CONVEYOR

650mm (26") wide
2.9m (9' 6") stockpile height
Hydraulically folding

5 MIDSIZE SIDE CONVEYOR

650mm (26") wide
2.8m (9' 2") stockpile height
Hydraulically folding

6 POWER UNIT

Tier 3: Deutz D2011 L04I 36.4kW (48.8hp) @2300rpm
Tier 4F: Deutz TD2.9L4 42kW (56.3hp) @1900rpm
Stage V: Deutz TD2.9 45kW (60hp) @2200rpm
Fuel Tank: 145L (38 US Gal)

DIMENSIONS

WORKING



TRANSPORT

Length: 10.98m (36')
Width: 2.25m (7' 5")
Height: 2.55m (8' 4")


WEIGHT

Total Weight: 12,000kg (26,455 lbs)

TITAN 1300



The Titan 1300 is a highly adaptable scalping screen which can operate in both scalping and precision screening applications and will excel in even the most difficult of materials.

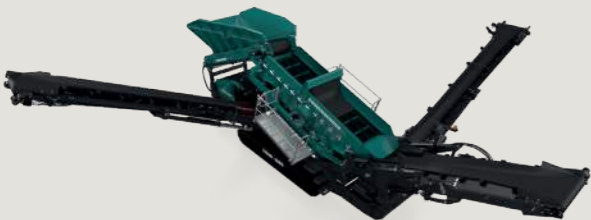

APPLICATIONS

AGGREGATE	RECYCLING	MINING
<ul style="list-style-type: none"> Sand & gravel Blasted rock River rock 	<ul style="list-style-type: none"> Top Soil C&D waste Composed materials Wood By-Products Overburden Foundry Waste 	<ul style="list-style-type: none"> Processed ores Processed minerals

TECHNICAL HIGHLIGHTS



- High capacity output of up to 350tph (386 US tph), from a small footprint



- Highly aggressive double deck 13' 6" x 4' screenbox with variable screening angle and numerous screen media options, majority common with the Warrior 800




- Suitable for scalping or stockpiling as a 3-way or 2-way split machine



- Jack up screen facility for access to screen media & underscreen conveyor

- Quick set up time- typically under 15 minutes

- Heavy duty inclined hopper & belt feeder featuring impact bars & impact rollers

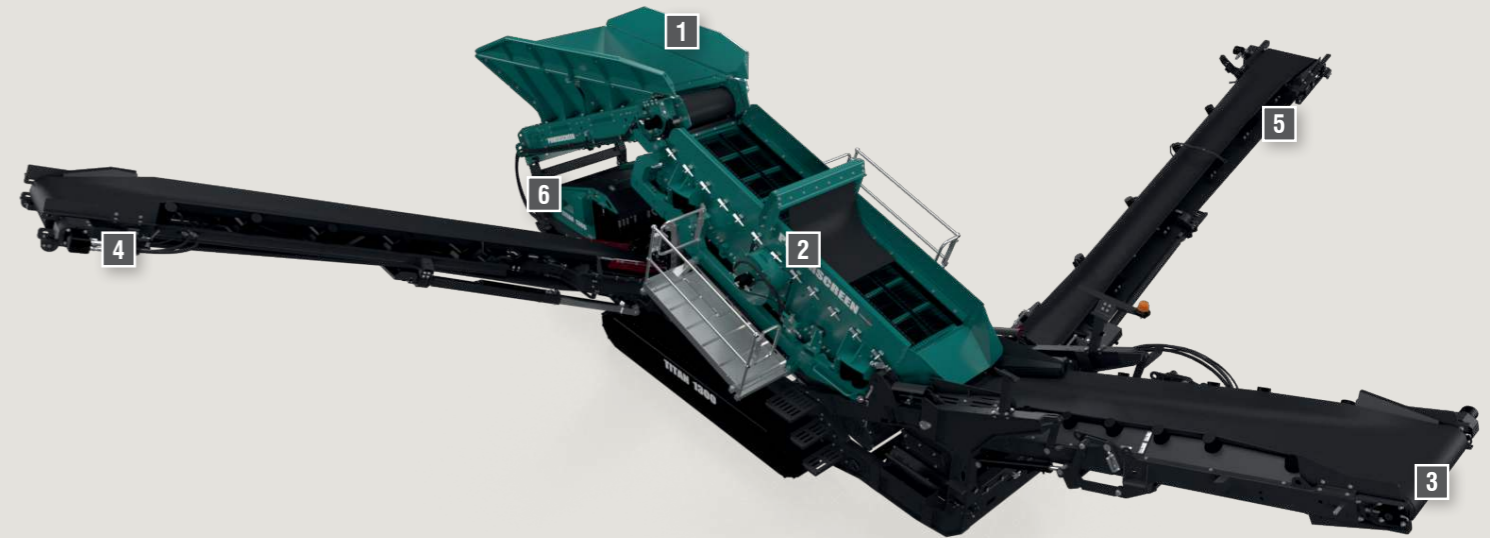

TECHNICAL SPECIFICATION

- | | |
|--|--|
| 1 FEEDER/HOPPER
1100mm (44") wide heavy-duty belt feeder
Hopper capacity: 5m ³ (6.5 cu. yd)
Hydraulic folding hopper extensions as standard
Folding rear hopper door for direct feeding | 4 FINE SIZE SIDE CONVEYOR
800mm (32") wide
3.9m (12' 9") stockpile height
Variable speed control
Self tensioning feedboot extensions |
| 2 SCREENBOX
Heavy duty 2 deck 4.1m (13' 6") x 1.22m (4') screenbox
2 bearing incline screen with highly aggressive screen drive
Hydraulic screen angle adjustment
Excellent classification of materials as a result of longer screen deck | 5 MIDSIZE SIDE CONVEYOR
650mm (26") wide
3.6m (11' 10") stockpile height
Variable speed control
Self tensioning feedboot extensions |
| 3 OVERSIZE TAIL CONVEYOR
1050mm (42") wide
3m (9' 10") stockpile height
Impact bed support
Variable speed control | 6 POWER UNIT
Tier 3: CAT C4.4 62kW (83hp) @2350rpm
Tier 4F: CAT C3.4 55Kw (74hp) @2350rpm
Stage V: CAT C2.2 55kW (74hp) @2350rpm
Fuel Tank Capacity: 372L (86 US Gal) |

DIMENSIONS

WORKING Length: 12,500mm (41') Height: 4,100mm (13' 5")	TRANSPORT Length: 11m (36' 1") Width: 2.5m (8' 2") Height: 3.1m (10' 2")
WEIGHT Total Weight: 20,750kg (45, 745lbs)	

TITAN 2300



The Titan 2300 is a new secondary scalper designed for a wide range of applications. Capable of a 3-way or 2-way material split, this highly versatile screener can be operated as a standalone unit or as secondary scalper in a large variety of applications

The highly aggressive single shaft screenbox can provide up to 700tph (771 US tph) depending on the application making the Titan 2300 an extremely versatile machine in a lightweight and compact transport envelope



APPLICATIONS

AGGREGATE	RECYCLING	MINING
<ul style="list-style-type: none"> Sand & gravel Blasted rock River rock 	<ul style="list-style-type: none"> Top Soil C&D waste Composed materials Wood By-Products Overburden Foundry Waste 	<ul style="list-style-type: none"> Processed ores Processed minerals

TECHNICAL HIGHLIGHTS



- High capacity up to 700 tph / 771 US tph (depending on media sizes & material type)



- Titan 2300 boasts the widest feed conveyor (1500mm / 60") in the Powerscreen mobile screener range with a heavy duty twin gearbox drive



- Highly aggressive 6.1m x 1.83m (20' x 6') screenbox running at up to 5G force



- Excellent stockpiling capacity in a lightweight and compact transport envelope

- Titan 2300 has been designed with generous material transfer zones, optimising it for large volumes of material flow in applications such as biomass


- CAT C4.4 129 kW (173hp) engine across all applications running at 2200rpm which minimises fuel burn with the option for Dual Power available



TECHNICAL SPECIFICATION

1 FEEDER/HOPPER 6.2m ³ (8.1 cu. yd) hopper capacity / 11m ³ (14.4 cu. yd) with extensions Optional hydraulic folding hopper extensions 1500mm (60") belt feeder Heavy duty Toughflex belt option available for secondary scalping applications	4 FINE SIZE SIDE CONVEYOR Width: 1400mm (56") Single tear-drop scraper as standard
2 SCREENBOX 6.1m (20') x 1.83m (6') 2 deck screen Highly aggressive single shaft 2 deck, 2 bearing screen drive Adjustable stroke and speed Adjustable screen angle between 13° - 17°	5 MIDSIZE & FINESIZE SIDE CONVEYOR Width: 1050mm (42") 4.1m (13' 5") stockpile height Variable speed control Hydraulically folding and angle adjustable
3 OVERSIZE TAIL CONVEYOR Width: 1600mm (64") 3.85m (12' 8") stockpile height Adjustable angle and variable speed control	6 POWER UNIT Tier 4F/Stage V: CAT C4.4 129kW (173hp) @2200rpm 336L (89 US Gal) fuel tank 450L (199 US Gal) hydraulic oil tank

DIMENSIONS

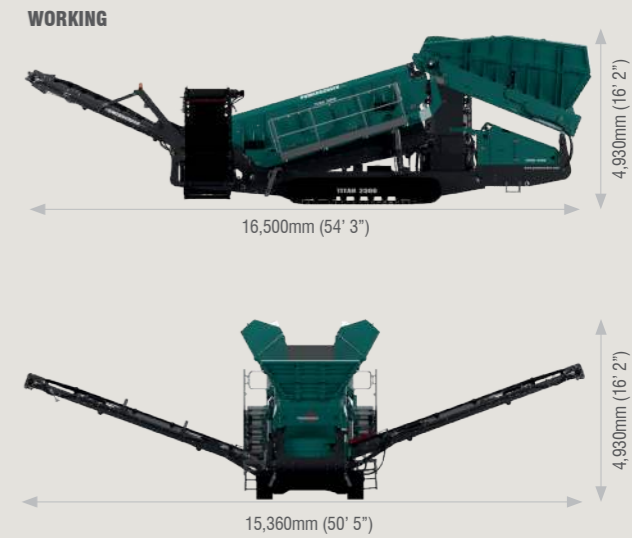

TRANSPORT	WEIGHT
Length: 18.2 m (59' 10") Width: 3m (9' 11") Height: 3.6m (11' 10")	Total Weight: 37,000kg (81,571lbs)



TITAN

RANGE

POWERSCREEN CONTACT DETAILS

Dungannon

200 Coalisland Road, Dungannon,
Co Tyrone, BT71 4DR, Northern Ireland
Tel: +44 (0) 28 87 718 500
Fax: +44 (0) 28 87 747 231

Louisville

11001 Electron Drive,
Louisville, Kentucky, 40299 USA
Tel: +1 502 736 5200
Fax: +1 502 736 5202

www.powerscreen.com

Email: mail@powerscreen.com

CONNECT WITH US

 @powerscreenofficial

 @powerscreen

 @powerscreenofficial

 @powerscreen

 @powerscreenofficial

The material in this document is for information only and is subject to change without notice.

Powerscreen assumes no liability resulting from errors or omissions in this document, or from the use of the information contained herein. Due to continual product development we reserve the right to change specifications without notice. Product performance figures given in this brochure are for guidance purposes only, this information does not constitute an expressed or implied warranty or guarantee. Results will vary depending on conveyor settings, feed source and types of material being processed. will vary depending on crusher chamber settings, screen media and sizes, feed source and types of material being processed.

Images are for illustrative purposes only, some or all of the machines in the illustrations may be fitted with optional extras. Please check with your Dealer for details on optional extras.

Powerscreen® is a registered trademark of Terex GB Limited in the United States of America and many other countries. Copyright 2021 Terex GB Limited. Published and Printed in August 2021.

